





Description

TD62 is a medium capacity thermodynamic steam trap. These horizontal /vertical traps are easy to maintain. This steam trap is designed with replaceable seat and internal strainer.

Material

NO	Part	Material					
1	Body	ASTM A217 Gr.WC6					
2	Cover	ASTM A217 Gr.WC6					
3	Strainer cap	ASTM A217 Gr.WC6					
4	Strainer screen	Stainless steel					
5	Disc	Stainless steel					
6	Seat	Stainless steel					
7	Cover studs (top)	ASTM A193 Gr.B16					
7A	Cover studs (bottom)	ASTM A193 Gr.B16					
8	Cover studs (top)	ASTM A194 Gr.8M					
9	Cover gasket	Spirally wound					
10	Name plate	Stainless steel					

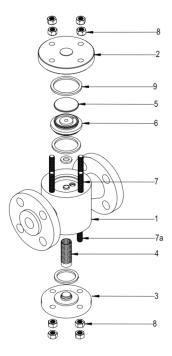


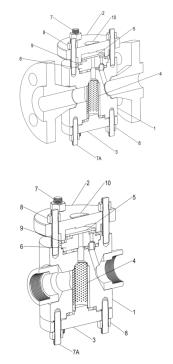


Dimensions / weights (approximate) in mm and kg

`		,		U		
Size		$\frac{1}{2}$	$\frac{3}{4}^{"}$	1"		
A		88	88	88		
В	#300	180	185	195		
Ь	#600	190	192	205		
С		120	123	133		
D		72	72	72		
Е		40	40	40		
F		30	30	30		
ht	Screwed	7	7	7		
Weight	#300	8.5	9.5	10		
W	#600	8.8	10	10.5		
Cap	acity					

500 _[

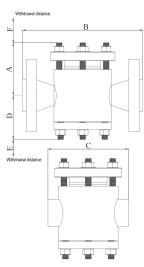

Pressure / temperature limits

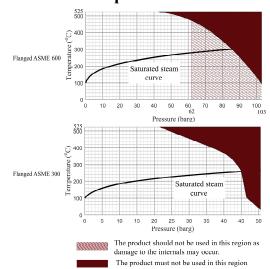

Body design conditions	ANSI600			
PMA (Max. allowable pressure)	103barg@93°C			
TMA (Max. allowable temp.)	525°C@42.7barg			
Max. cold hydraulic test pressure	155 barg			

	400							_	Н					_	+	
(g/h)	300										_		1			
Condensate (Kg/h)							_	+								
densa	200							+	H					+	+	-
Conc																
	100	.4 2	2	3	4	5			10)	2	0	30	40	50	<u></u>

Differential pressure (barg)

Available spares
Disc and seat
Strainer screen
Gaskets

Phone:051-35413212 Email: info@karajet.com Website: www.karajet.com